

# KM-101BAH

## SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

KM-101BAH

4/08



Item # 13209

### CUBER DIMENSIONS W x D x H

**KM-101BAH**  
23<sup>3/4</sup> x 24 x 39\*  
\* with 6" legs



**KM-101BAH**  
Air-Cooled  
Shown

- Up to 115 lbs. of ice production per 24 hours
- Up to 53 lbs. of built-in storage capacity
- Individual crescent cube
- Durable stainless steel exterior
- CycleSaver® Design 
- EverCheck® alert system 
- Front in, front out airflow
- Stainless steel evaporator
- Slide in door
- Removable air filter
- Power switch accessible without panel removal
- Built-in installation possible
- Optional drain pump HS-0190 with HS-0215\*  
(\*HS-0215 included at no extra charge)
- Complies with California Energy Commission (CEC)
- R-134a Refrigerant

\* The KM-101BAH is ENERGY STAR certified.

Distributed By:  
Commercial Refrigeration Service, Inc.  
WWW.IceCubes.NET  
(866) 423-6253  
(623) 869-8881



### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine.

**Five Year** - Parts & Labor on: Evaporator.

**Five Year** - Parts on: Compressor, air-cooled condenser coil.



# SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

## DIMENSIONS

W x D x H

**KM-101BAH**  
23<sup>3/4</sup> x 24 x 39<sup>\*</sup>  
\*with 6" legs

• Air-cooled

### AIR-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	115	107	97
80°	109	97	87
90°	107	<b>88</b>	78


### UTILITY CONSUMPTION

Model Number	Ice Production Per Cycle		KWH per 100 LBS.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KM-101BAH	2.31	110	9.4	23.0	N/A


### SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-101BAH	Air-Cooled	5.2	15A	136 lbs.


### KM CUBE DIMENSIONS




Distributed By:  
Commercial Refrigeration Service, Inc.  
WWW.IceCubes.NET  
(866) 423-6253  
(623) 869-8881

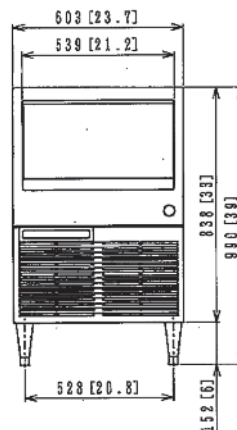

FRONT DIMENSIONS

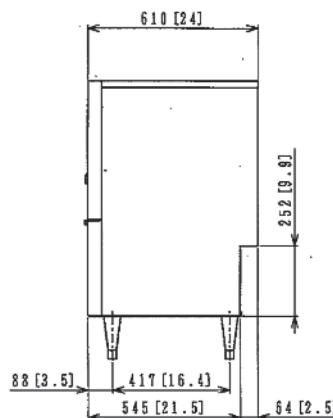

SIDE DIMENSIONS

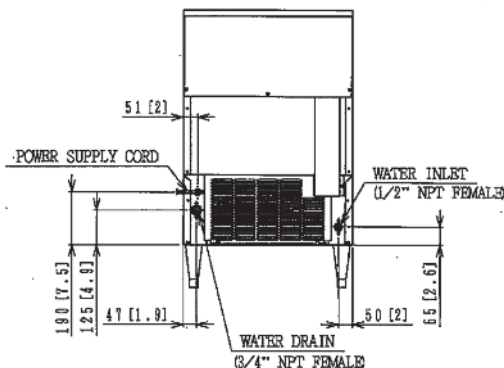

BACK DIMENSIONS

### ELECTRICAL & PLUMBING/KM-101BAH

- 115V/60/1
- 15 amp Max Fuse/HACR Breaker Size
- 3/8" OD copper or equivalent independent potable water supply
- 3/4" independent drain connection
- 1/2" FPT Water Inlet



© HOSHIZAKI AMERICA, INC.

### OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

