

# Ice-O-Matic®

Distributed By:  
 Commercial Refrigeration Service, Inc.  
 623-869-8881  
 or toll free (866) IceMakers  
<http://WWW.866IceMakers.COM>

## EF800 - Self Contained Flake Ice Maker



EF800

### Features

- Produces up to 752 lbs (342 kg) of ice per day.
- Constructed with a brass evaporator and rugged stainless steel transport system enclosed in polyurethane insulation.
- Removes excess water by pushing the flaked ice through an extrusion process.
- Constructed from sturdy, corrosion-resistant stainless steel.
- Filter Free Air -No air filter to change.

### Options & Accessories

Water Filters			
Ice Machine Model	Manifold		Inline
	System	Replacement	System
EF800	IFQ1	IOMQ (1)	IFI4C / IFI8C

### Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

#### Parts & Labor

- Two years **Parts** and **Labor**.

### Ice Form



### Space-Saving Solutions

- Self-contained insulated storage available in 213 lbs (97 kg) or 315 lbs (143 kg).
- Your choice of 38" (965 mm) or 48" (1,219 mm) wide cabinets.
- Ultra low profile- 41" (1041mm) tall
- Air intake on only 1 side



# Ice-O-Matic®



Distributed By:  
 Commercial Refrigeration Service, Inc.  
 623-869-8881  
 or toll free (866) IceMakers  
<http://WWW.866IceMakers.COM>

EF800 Self Contained Flake Ice Maker

## Air Cooled

Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.

- A. Ice maker potable water in, 3/8" FPT.
- B. Drain, 1/2" i.d. plastic tubing.
- C. Hole for electrical connections.

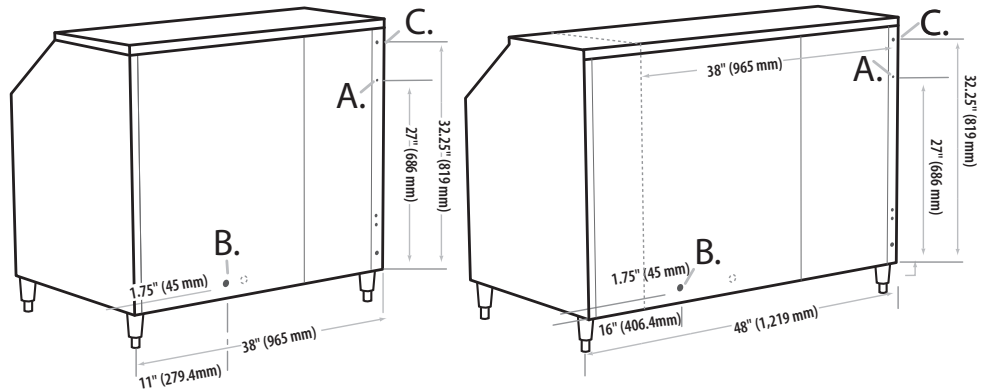

Air Cooled

## Operating Requirements

	Minimum	Maximum
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)
Water Temp.	40°F (4.4°C)	80°F (26.7°C)
Water Pressure	20 PSIG (1.4 BAR)	60 PSIG (4.1 BAR)

## Dimensions

Models	Size	
	W x D x H (inches)	W x D x H (mm)
EF800A38S	38" x 28" x 41"	965 mm x 711 mm x 1,041 mm
EF800A48S	48" x 28" x 41"	1,219 mm x 711 mm x 1,041 mm

## Specifications

Model Number	Cabinet Width inch (mm)	Bin Size lbs (kg)	Cond. Unit	Ice Production per 24hrs		Water Usage gallons per 100 lbs of ice 90°F air/ 70°F water	kWH Used per 100 lbs of ice @ 90°F air/ 70°F water	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	Approx. BTUs per hour
				70°F air/ 50°F water lbs (kg)	90°F air/ 70°F water lbs (kg)						
EF800A38S	38 (965)	213 (97)	Air	752 (342)	588 (267)	12	4.9	115/60/1	18.2	20	7,277
EF800A48S	48 (1219)	315 (143)	Air	752 (342)	588 (267)	12	4.9	115/60/1	18.2	20	7,277

### NOTES:

Number of Wires: 3 (including ground)  
 Approx. Shipping Weight lbs (kg): EF800A38S 290 (132) • EF800A48S 325 (142)  
 Refrigerant Type: R404A