

REFRIGERATOR MANUFACTURER

# Turbo Air

## Back Bars

Back Bars

High Quality Stainless Steel Interior and Countertop



### FEATURES / BENEFITS

- **EFFICIENT REFRIGERATION SYSTEM**  
Turbo Air's refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.
- **ADJUSTABLE, HEAVY DUTY, PE (POLYETHYLENE) COATED WIRE SHELVES**
- **STAINLESS STEEL LOUVER**  
Positive guided, forced air cooling system ensures cold product.
- **TRIPLE GLASS**  
Triple pane thermal glass provides extra ability to maintain cool temperatures.
- **STAINLESS STEEL CABINET CONSTRUCTION**  
This model boasts a stainless steel interior and counter top. It guarantees the utmost in cleanliness and long product life. The Back Bar can add a touch of style to the most refined setting.
- **ERGONOMICALLY DESIGNED DOORS**  
Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience. ABS sheet door liners resist water condensation with thermal efficiency.
- **HIGH-DENSITY POLYURETHANE INSULATION**  
Entire cabinet structure is formed-in-place using high density, CFC free polyurethane insulation.
- **SIDE MOUNT COMPRESSOR UNIT**  
Through positioning the compressor to the side, the refrigerator can be serviced without being moved. By innovatively creating a front breathing feature, this model can provide high efficiency in narrow spaces.
- **FLUORESCENT INTERIOR (SG MODEL ONLY)**  
Bright fluorescent interior lighting is specifically designed for perfect visibility throughout the interior.
- **INCANDESCENT INTERIOR LIGHTING**
- **REFRIGERATOR HOLDS 33°F ~ 38°F FOR THE BEST IN BEVERAGE PRESERVATION**

Distributed By:

Commercial Refrigeration Service, Inc.  
<http://WWW.IceCubes.NET>  
 623-869-8881 or toll free 866-IceMakers

Model	Swing Door	CU./FT.	Capacity <sup>(12oz Cans)</sup> w/o Shelves / w/Shelves	#of Shelves	HP	AMPS	Crated Weight	L D H
TBB-2SG	2	19	774ea / 504ea	6	1/3	7.0	331	58 1/2 x 27 1/5 x 37 1/9
TBB-2SB	2	19	774ea / 504ea	6	1/4	7.0	309	58 1/2 x 27 1/5 x 37 1/9
TBB-3SG	2	23	942ea / 616ea	6	1/3	7.0	397	69 x 27 1/5 x 37 1/9
TBB-3SB	2	23	942ea / 616ea	6	1/4	7.0	375	69 x 27 1/5 x 37 1/9

## TBB-2SB / TBB-3SB / TBB-2SG / TBB-3SG SPECIFICATIONS

MODEL	TBB-2SB	TBB-3SB	TBB-2SG	TBB-3SG
Exterior Dimension(LxDxH)	58 1/2 x 27 1/2 x 37 1/8	69 x 27 1/2 x 37 1/8	58 1/2 x 27 1/2 x 37 1/8	69 x 27 1/2 x 37 1/8
Cubic Feet	19	23	19	23
Compressor (HP)	1/4	1/4	1/3	1/3
Shelves	6 ea	6 ea	6 ea	6 ea
Net Weight	276lbs	298lbs	286lbs	308lbs
Voltage (NEMA 5-15P)	115V / 60Hz	115V / 60Hz	115V / 60Hz	115V / 60Hz
Amp	7.0A	7.0A	7.0A	7.0A
Cord Length	8.7 ft.	8.7 ft.	8.7 ft.	8.7 ft.
Plug-In	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P

- **SELF-CONTAINED SYSTEM**
- **DOOR LOCKS STANDARD (SB MODEL ONLY)**
- **4" SWIVEL CASTERS**
- **REMOTE CABINETS AND CONDENSING UNITS AVAILABLE FOR ALL MODELS.**

\*Design and specifications subject to change without notice.

- **WARRANTY : 1 Year Labor and Parts Warranty  
 Additional 4 Years Warranty on Compressor**




LISTED  
 COMMERCIAL  
 REFRIGERATOR  
 AND/OR FREEZER  
 438K




ISO9001




(unit : inch)




TBB-2SG PLAN VIEW

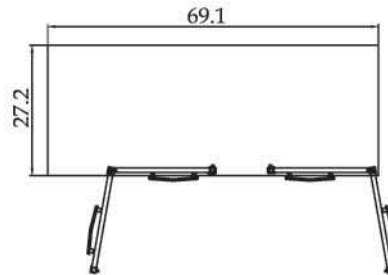


TBB-3SG PLAN VIEW




SIDE VIEW




TBB-2SG FRONT VIEW

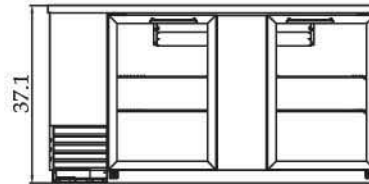


TBB-3SG FRONT VIEW

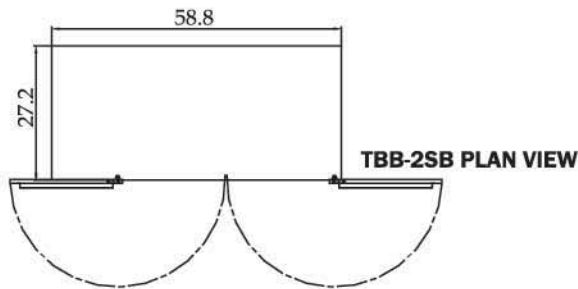


TBB-2SB PLAN VIEW

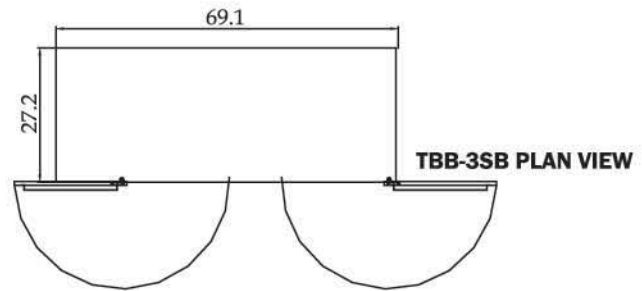

TBB-3SB PLAN VIEW

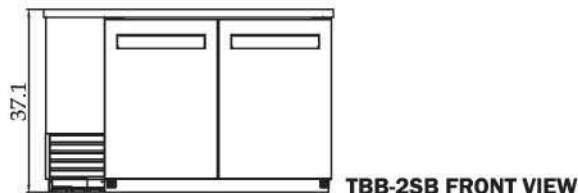

TBB-2SB FRONT VIEW

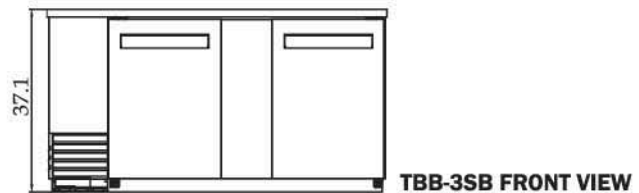

TBB-3SB FRONT VIEW

# NEW Back Bars

## High Quality Stainless Steel Interior and Countertop

### 30% Energy saving device (Revolution of industry)

Without decreasing Turbo Air's well crafted compressor's size, we've successfully developed a revolutionary technological breakthrough that decreases energy consumption by 30% and increases the life of the refrigerator.



**TBB-1SB**



**TBB-4SB**



**TBB-4SG**

### FEATURES / BENEFITS

- EFFICIENT REFRIGERATION SYSTEM**  
 Turbo Air refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.
- FORCED AIR COOLING SYSTEM**  
 Fast cooling and balanced temperature throughout the cabinet.
- STAINLESS STEEL CABINET CONSTRUCTION**  
 This model boasts a stainless steel interior and counter top. It guarantees the utmost in cleanliness and long product life. The Back Bar can add a touch of style to the most refined setting.
- HIGH-DENSITY POLYURETHANE INSULATION**  
 Entire cabinet structure is formed-in-place using high density, CFC free polyurethane insulation.
- FLUORESCENT INTERIOR (SG MODEL ONLY)**  
 Bright fluorescent interior lighting is specifically designed for perfect visibility throughout the interior.
- ADJUSTABLE, HEAVY DUTY, PE(POLYETHYLENE) COATED WIRE SHELVES**
- TRIPLE GLASS**  
 Triple pane thermal glass provides extra ability to maintain cool temperatures.
- ERGONOMICALLY DESIGNED DOORS**  
 Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience. ABS sheet door liners resist water condensation with thermal efficiency.
- SIDE MOUNT COMPRESSOR UNIT**  
 Through positioning the compressor to the side, the refrigerator can be serviced without being moved. By innovatively creating a front breathing feature, this model can provide high efficiency in narrow spaces.
- INCANDESCENT INTERIOR LIGHTING**
- REFRIGERATOR HOLDS 33°F ~ 38°F FOR THE BEST IN BEVERAGE PRESERVATION**

Model	Swing Door	CU./FT.	1/2 Barrels	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D' x H' (inches)	Available Date
TBB-1SB	1	7.5	1	2	1/10	4	225	235/8 x 293/4 x 405/8	Feb. 10. 2011
TBB-4SB	3	30	4	8	1/3	7.5	485	903/8 x 271/4 x 371/8	Feb. 10. 2011
TBB-4SG	3	30	4	8	1/3	7.5	493	903/8 x 271/4 x 371/8	Feb. 10. 2011

\* Height does not include 6" for caster height. \* Depth does not include 1" for door handle (SG Models). \* Depth does not include 1-1/4" for rear spacers.